


Barra de 4 m

Ø exterior en mm	Grueso pared mm	Modelo	Código	€/m
6,35	0,80	TB-1/4"	203008	4,65
9,52	0,80	TB-3/8"	203010	6,40
12,70	0,80	TB-1/2"	203012	8,56
15,87	0,80	TB-5/8"	203014	10,98
19,06	1,00	TB-3/4"	203016	15,50
22,23	1,00	TB-7/8"	203018	18,41
25,40	1,00	TB-1"	203020	21,32
28,57	1,00	TB-1-1/8"	203022	23,90
34,92	1,25	TB-1-3/8"	203024	36,82
41,27	1,25	TB-1-5/8"	203026	43,93
53,97	1,25	TB-2-1/8"	203028	56,85
66,67	1,65	TB-2-5/8"	203030	93,02
79,37	1,65	TB-3-1/8"	203032	113,00
92,08	1,65	TB-3-5/8"	203040	147,00
104,78	2,79	TB-4-1/8"	203045	280,00

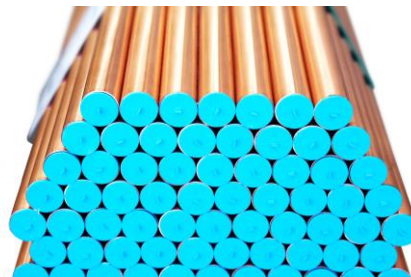

Cumple norma EN 12735-1

Suministro en barra de 4 m excepto 4 1/8" en barra de 5 m

Barra de 5 m reforzada para CO2 subcrítico

Ø exterior en mm	Grueso pared mm	Presión máx. trabajo (bar)	Modelo	Código	€/m
15,87	1,00	64	TB-5/8"-L	203107	14,36
22,23	1,14	50	TB-7/8"-L	203110	22,23
28,57	1,25	42	TB-1-1/8"-L	203114	32,15
34,92	1,65	46	TB-1-3/8"-L	203116	51,30
41,27	1,65	39	TB-1-5/8"-L	203120	62,30
53,97	2,50	45	TB-2-1/8"-L	203122	124,00
66,67	3,06	45	TB-2-5/8"-L	203124	191,00



Cumple norma EN 12735-1

Barra reforzada para CO2 transcrito, Tipo K65

Ø exterior en mm	Grueso pared mm	Presión máx. trabajo (bar)	Modelo 5m	Código	€/m	Modelo 4m	Código	€/m
9,52	0,65	120	3/8"-120B	203155	11,10	3/8"-120B4M	203165	9,99
12,70	0,85	120	1/2"-120B	203156	19,24	1/2"-120B4M	203166	17,76
15,87	1,05	120	5/8"-120B	203157	28,49	5/8"-120B4M	203167	26,64
19,06	1,30	120	3/4"-120B	203158	42,55	3/4"-120B4M	203168	40,33
22,23	1,50	120	7/8"-120B	203159	57,35	7/8"-120B4M	203169	54,76
28,57	1,90	120	1-1/8"-120B	203161	91,76	1-1/8"-120B4M	203170	88,80
34,92	2,30	120	1 3/8"-120B	203162	150,00	1-3/8"-120B4M	203171	144,00
41,27	2,70	120	1 5/8"-120B	203163	194,00	1-5/8"-120B4M	203172	189,00
53,97	3,55	120	2 1/8"-120B	203164	363,00	2-1/8"-120B4M	203173	355,00

Cumple norma EN 12735-1